

**Versatile and Rugged Industrial Lithium/LiPO Charger Series**



- **California Energy Compliant**
- **Rugged and reliable design**
- **Power phase-back with temperature**
- **Wide operating temperature range**
- **Transient protected input/output**
- **Active I/O reverse polarity protection**
- **Informative LED display**
- **Optional wireless/digital interface**
- **Relay and discrete I/O signals**
- **Over temp protection with auto reset**
- **Overcurrent / overvoltage protected**
- **Three year warranty**

**Description**

The M-series is an environmentally robust and sophisticated battery chargers with models supporting Lithium or LiPo batteries. With a wide operating temperature range (-25°C to 65°C), a rugged mechanical design, and AC or DC input power options, this product is well suited for high end industrial applications. The charger complies with the California Energy Commission guidelines and with UL/CSA specifications pending.

This charger's unique mechanical design provides a sealed unit with a replaceable fan for increased power capability in high ambient temperatures. This provides extremely high power density and environmental reliability.

The M-series optional external communications can be programmed with user specific firmware. The product may be ordered with an optional user defined set of

discrete I/O signals, a wireless option, an RS-232 or RS-485, CAN or other interfaces. An informative LED display indicates state of charge, input power present, battery voltage and current, fault conditions and proper battery connection are standard.

The M-series charger precisely controls the charging algorithm to insure a complete recharge while prolonging battery life. The charger can be programmed for direct pack charging, an SMBus interface or with a BMS (battery management system) equipped pack.

The charger may be left connected indefinitely and the product ideal for remote and standby applications. It can be mounted in any orientation and ordered with input and output power connectors per customer specification. Customized charging algorithms, power sequencing and control/monitoring options are available upon request.

**AC input model specifications**

PARAMETER	DESCRIPTION / CONDITIONS
AC input voltage range	3 input ranges covering 85 VAC - 240 VAC
Input AC amps (max)	Measured at 85 VAC / 1200 watts output: 20 Arms without PFC
AC input configuration	AC input: line, neutral , chassis ground
Connector	IEC-320

**DC input model specifications**

PARAMETER	DESCRIPTION / CONDITIONS
DC input voltage range	8 input ranges covering 11 VDC to 500 VDC
Input DC amps (max)	Measured at 40 VDC / 1200 watts output: 35A
DC input configuration	DC input: DC Power, DC Return, Chassis ground
Connector	Anderson PP-75

## M-Series Model Specific Specifications


### Lithium-ion/LiPO battery charging curve

A three stage charge routine which is recommended by lithium-ion and LiPO battery manufacturers is described below.

**Stage 1: Precharge.** If the battery is deeply discharged, a precharge of approximately 300mA is applied until the voltage is 2.8 volts/cell.

**Stage 2: Constant current mode.** The charger provides constant current until the battery voltage is  $V_{tpf}$  volts/cell.

**Stage 3: Top off mode.** This is the final stage of the charging routine. The battery voltage is maintained at approximately  $V_{tpf}$  volts/cell. When the charging current decreases to 300mA, the charge is terminated until the next discharge cycle.

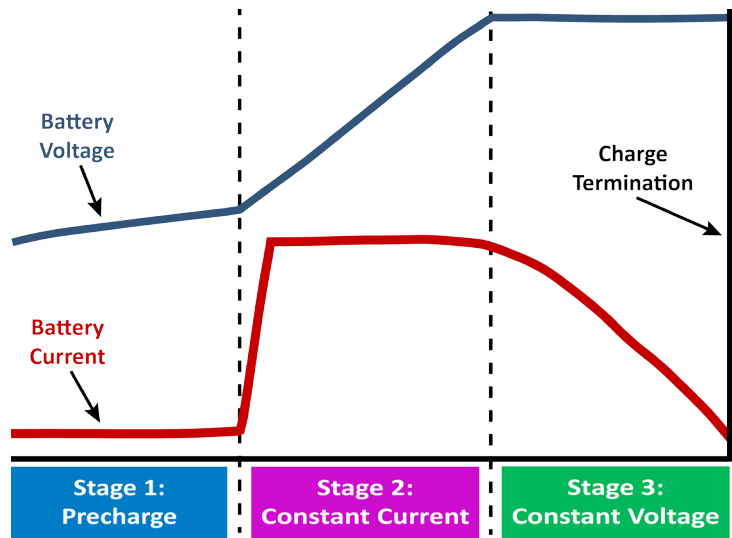

## Standard LED indicators

PARAMETER	GREEN	RED/GREEN	RED	RED on/off	GREEN on/off
state of charge	Complete	Top Off	Constant Current	-	-
battery voltage (volts)	< 75% of $V_{tpf}$	75% to 85% of $V_{tpf}$	85% to 95% of $V_{tpf}$	> 95% of $V_{tpf}$	-
battery current (amps)	< 10% of $I_{max}$	10% to 30% of $I_{max}$	30% to 90% $I_{max}$	> 90% of $I_{max}$	-
fault indicator	Polarity OK	Short/Reversed	Battery < 2.7V/cell	Over Voltage	Over Temperature
input power	Power Good	-	-	-	-

## M-Series Lithium/LiPo Charger Common Specifications

CHARGING PARAMETERS	DESCRIPTION
Termination current ( $I_{tm}$ )	500mA +/- 50mA
Termination transition timeout	3 hours
Minimum battery start voltage	2.5V/cell
Standby battery drain	<400uA with input power off
Termination $V_{bat}$ rate (dv/dt)	$V_{bat} < 0.9 * V_{tpf}$ , $I_{bat} > 0.5A$ , dv/dt < 200mv/hour
Max charging time	Terminate if $> I_{max} / 3 > 15$ hours
Overvoltage protection	Maximum Charging Voltage + 1.0V
Output noise and ripple (PARD)	<150mV, 100MHz BW
Regulation	$\pm 0.5\%$
Efficiency	Minimum 80% at max load

## M-Series Lithium/LiPO Charger Ordering Guide, p/n abM-xy-z-r

P/N Field	Definition	Options	Description																																
a	Battery Chemistry	T - Lithium L - LiPo	Battery Chemistry																																
b	Input Power	A - AC input E - DC input	See description of field z in the part number for input voltage range options.																																
x	Number of Series Cells  Defines the output voltage.	The options are:  <b>3S, 4S, 5S, 6S, 7S, 8S, 10S, 12S, 14S, and 18S</b>	This option defines the Maximum Charging Voltage.  For Lithium and LiPO based chargers the maximum output voltage is the number of cells multiplied by maximum cell voltage of 4.2V. For example, 3S would specify a 12.6V charger.																																
y	Maximum Charging Current	Maximum Charging Current in amps.  For standard model the maximum charging current is determined by the number of Series Cells, see tables to the right. If a <b>lower</b> maximum output current is desired then it is specified in this field as amps.  For example a standard AC input Lithium 4S model is ordered as TAM-S450-1. If a charger with a maximum output current of 35 amps is needed the order number would be TAM-S435-1.	<table border="1" style="margin: auto;"> <thead> <tr> <th colspan="2">Maximum Charging Current vs. Number of Series Cells</th> </tr> <tr> <th>Series Cells</th> <th>Max. Current</th> </tr> </thead> <tbody> <tr><td>3S</td><td>100 Amps</td></tr> <tr><td>4S</td><td>50 Amps</td></tr> <tr><td>5S</td><td>40 Amps</td></tr> <tr><td>6S</td><td>30 Amps</td></tr> <tr><td>7S</td><td>27 Amps</td></tr> <tr><td>8S</td><td>25 Amps</td></tr> <tr><td>10S</td><td>20 Amps</td></tr> <tr><td>12S</td><td>16 Amps</td></tr> <tr><td>14S</td><td>14 Amps</td></tr> <tr><td>18S</td><td>11 Amps</td></tr> </tbody> </table>	Maximum Charging Current vs. Number of Series Cells		Series Cells	Max. Current	3S	100 Amps	4S	50 Amps	5S	40 Amps	6S	30 Amps	7S	27 Amps	8S	25 Amps	10S	20 Amps	12S	16 Amps	14S	14 Amps	18S	11 Amps								
Maximum Charging Current vs. Number of Series Cells																																			
Series Cells	Max. Current																																		
3S	100 Amps																																		
4S	50 Amps																																		
5S	40 Amps																																		
6S	30 Amps																																		
7S	27 Amps																																		
8S	25 Amps																																		
10S	20 Amps																																		
12S	16 Amps																																		
14S	14 Amps																																		
18S	11 Amps																																		
z	Input voltage range	For AC input chargers, three options; 01, 02, and 03 are available  For DC input chargers, eight options; 07, 08, 09, 10, 11, 12, 13, and 14 are available.	<table border="1" style="margin: auto;"> <thead> <tr> <th colspan="4">Input Voltage Range Options</th> </tr> <tr> <th>Option</th> <th>Input Voltage Range</th> <th>Option</th> <th>Input Voltage Range</th> </tr> </thead> <tbody> <tr><td>01</td><td>85 - 140 VAC</td><td>09</td><td>30 - 50 VDC</td></tr> <tr><td>02</td><td>180 - 300 VAC</td><td>10</td><td>38 - 75 VDC</td></tr> <tr><td>03</td><td>85 - 300 VAC</td><td>11</td><td>72 - 140 VDC</td></tr> <tr><td>07</td><td>11 - 20 VDC</td><td>12</td><td>100 - 200 VDC</td></tr> <tr><td>08</td><td>18 - 36 VDC</td><td>13</td><td>150 - 300 VDC</td></tr> <tr><td></td><td></td><td>14</td><td>250 - 500 VDC</td></tr> </tbody> </table>	Input Voltage Range Options				Option	Input Voltage Range	Option	Input Voltage Range	01	85 - 140 VAC	09	30 - 50 VDC	02	180 - 300 VAC	10	38 - 75 VDC	03	85 - 300 VAC	11	72 - 140 VDC	07	11 - 20 VDC	12	100 - 200 VDC	08	18 - 36 VDC	13	150 - 300 VDC			14	250 - 500 VDC
Input Voltage Range Options																																			
Option	Input Voltage Range	Option	Input Voltage Range																																
01	85 - 140 VAC	09	30 - 50 VDC																																
02	180 - 300 VAC	10	38 - 75 VDC																																
03	85 - 300 VAC	11	72 - 140 VDC																																
07	11 - 20 VDC	12	100 - 200 VDC																																
08	18 - 36 VDC	13	150 - 300 VDC																																
		14	250 - 500 VDC																																
r	Options	List of Available Options, listed separated by '-' characters, some options are mutually exclusive.  <b>An:</b> External Interface <b>Rxy:</b> Internal Relay	An: External Interface, choose n as follows: 0 - RS-232, 1 - RS-485, 2 - Wired Ethernet, 3 - CAN, 5 - Wireless Ethernet, 99 - Special Rxy: Internal Relay, there can be up to 4 internal relays x = relay configuration; O for NO, C for NC y = function; 1 - Over voltage, 2 - Charging, 3 - Over temperature, 4 - AC On																																
<p><b>Example: TAM-S450-01-RA1-RC3-RO4 specifies a Lithium(T), AC input(A) charger with maximum output voltage set to charge 4-series cells (S4) at a maximum current of 50 amps (50) and the AC input range is 85-140 VAC (01). The chargers has options for an RS-485 interface (RA1) with two relays, NC Over Temperature (RC3) and NO AC On (RO4)</b></p>																																			

## Certifications and Compliance (model dependant - consult factory)

a	UL CSA
b	CE mark
c	California Energy Compliant
d	RF emissions: US FCC Part 15 Class A, CISPR 22:2009
e	IEC 555, power factor
f	IEC 61000-4-5; Class 4 Severity Level, Surge
g	IEEE C2-2012 National Electrical Safety Code
h	NFPA 70-2014 National Electric Code
i	IEC 60950 Safety of IT Equipment; Pollution Degree 2
j	WEEE and Restriction of Hazardous Substances (ROHS) Directives 2002/95/EC
k	T-Mark

## Workmanship specifications

IPC-610	Acceptability of electronic assemblies IPC J-STD-006 Requirements for electronic grade solder alloys and fluxed and non-fluxed solid solders for electronic soldering applications
IPC-2221	FR4, 130C 94V-0
IPC/WHMA-A-620	Requirements and acceptance of wiring and cabling

## Mechanical specifications


PARAMETER	(units are in inches and pounds)
Dimensions	8.0 (L) x 6.0 (W) x 2.76 (H)
Chassis material	Aluminum
Chassis finish	Black anodized
Clearance	12 inches all sides
Mounting	#6 screws at six locations
Output connector	Model Dependant, consult factory
Fan connector	Molex P/N 53048-0310
Weight	Ten pounds
Fan noise during full-speed operation	< 45dBA

## Environmental specifications

PARAMETER	DESCRIPTION / CONDITIONS
Operating environment	Indoor/outdoor - IP67 -not submersible
Storage temp.	-40°C to +80°C
Operating temp.	-20°C to +60°C at maximum output over entire DC voltage range
Humidity	0°C to +95°C relative humidity (non-condensing)
Operational altitude	10,000 feet
Vibration	MIL-STD-810 or IEC60068-2-6 and -2-64 as applicable
Shock	MIL-STD-810 or IEC60068-2-27 as applicable
Isolation	Input - chassis: 2KVDC Input - output: 2KVDC Output - chassis: 500VDC
DC leakage current	Input - chassis: < 200uA at 2KVDC Input - output: < 100uA at 2KVDC
AC leakage current	< 3.5mA at 264VAC, 60Hz

## Control and monitoring

### Control and Monitor Interfaces

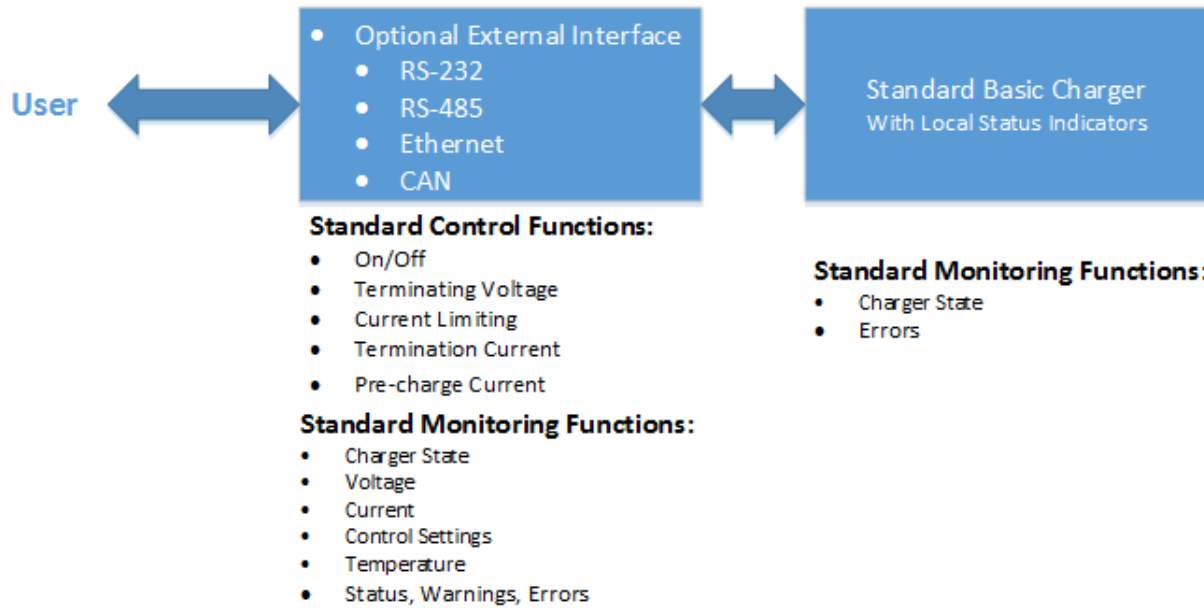

## Outline and mounting

